

PRODUCT CATALOG

TRUCK CLUTCH

Clutch Discs & Clutch Covers

Sizes: Ø325 / Ø350 / Ø380 / Ø395 / Ø430 mm

Disc & cover — Factory-direct




TorqClutch

WhatsApp / Tel: +86 131 2736 0650

Email: sunny@torqclutch.com

Web: torqclutch.com

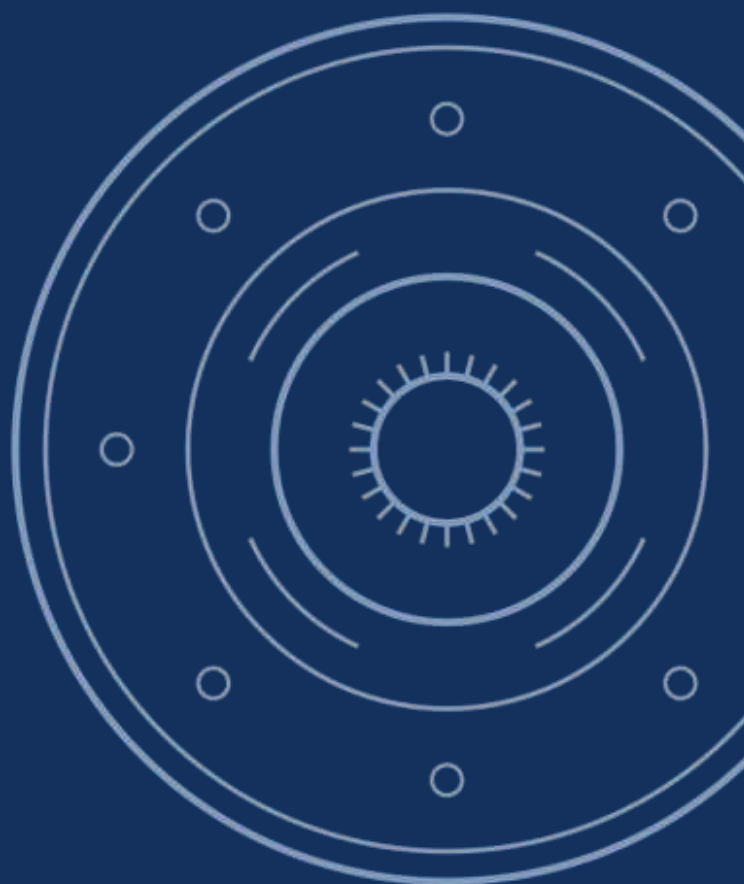

Product Range



Truck clutch discs & covers · Ø325–Ø430 mm

Clutch Discs

Ø325 mm

Ø350 mm

Ø380 / Ø395 mm

Ø430 mm — Part 1 / 2 / 3

· AMT & Small-spline

Clutch Covers

Ø325 mm

Ø350 mm

Ø380 mm

Ø395 mm

Ø430 mm — Pull / Push / AMT

Fitment: HOWO, SHACMAN, Foton, FAW, Dongfeng, JAC and more.

Each model shown with photo + specs. Match by dimensions, not by looks.

Tell us your truck model & quantity for exact match + FOB price.

K325-01

★ BEST SELLER

Ø325 Clutch Disc • Foton Aumark



Friction: Ø325×210/200 mm
Spline: Ø38.4 mm · 10 teeth
Springs: 8
Max torque: 900 N·m
Fitment: Weichai WP2.3N/WP3N, Yunnei D25; Foton, JAC

K325-02

Ø325 Clutch Disc • CA142 • 2-Stage, 6 Half-Covered-Coil



Friction: Ø325×190 mm
Spline: Ø38.4 · 10 teeth
Springs: 6
Max torque: 1000 N·m
Fitment: For engines with 26 mm flywheel bore

K325-03

Ø325 Clutch Disc • Foton Aumark



Friction: Ø325×210 mm
Spline: Ø38.4 · 10 teeth
Springs: 8
Max torque: 900 N·m
Fitment: Weichai WP2.3N/WP3N, Yunnei D25; Foton, JAC

K350-01

★ BEST SELLER

Ø350 Clutch Disc • 145 • 3-Stage, 6 Open -Coil



Friction: Ø350×210 mm
Spline: Ø38.4 · 10 teeth
Springs: 6
Max torque: 900 N·m
Fitment: thin → CA151 / Aumark cover, thick → 145 cover

K350-02

★ BEST SELLER

Ø350 Clutch Disc • FAW Jiefang (thin/thick)



Friction: Ø350×210 mm
Spline: Ø38.4 · 10 teeth
Springs: 8
Max torque: 900 N·m
Fitment: thin → CA151 / Aumark cover, thick → 145 cover

K350-03

★ BEST SELLER

Ø350 Clutch Disc • Aumark (thin/thick)



Friction: Ø350×210 mm
Spline: Ø38.4 · 10 teeth
Springs: 8
Max torque: 900 N·m
Fitment: thin → CA151 / Aumark cover, thick → 145 cover

K350-04

★ BEST SELLER

Ø350 Clutch Disc • CA151 • 2-Stage, 6 Half-Covered-Coil



Friction: Ø350×216 mm
Spline: Ø38.4 · 10 teeth
Springs: 6
Max torque: 1300 N·m
Fitment: Xichai CA1100ZQ, Yuchai YC6108, Cummins ISF3.8, Dachai CA4DK1/4DH1; CA151 & other thin-disc models; with 151 clutch cover

K380-01

Ø380 Clutch Disc • 3-Stage, 6 Open-Coil



Friction: Ø380×200 mm
Spline: Ø44.5 · 10 teeth
Springs: 6
Max torque: 1650 N·m
Fitment: Medium trucks <180 hp, Ø380 clutch

K380-02

Ø380 Clutch Disc • Aumark Driven Disc Assembly



Friction: Ø380×220 mm
Spline: Ø44.5 · 10 teeth
Springs: 8
Max torque: 1200 N·m
Fitment: JAC / Foton, with Foton Cummins ISF3.8 engine

K395-01

★ BEST SELLER

Ø395 Clutch Disc • 3-Stage, 8 Open-Coil • Reinforced



Friction: Ø395×230 mm
Spline: Ø44.5 · 10 teeth
Springs: 8
Max torque: 2300 N·m
Fitment: Medium trucks >200 hp, Ø395 clutch

K395-02

Ø395 Clutch Disc • 3-Stage, 6 Covered-Coil



Friction: Ø395×230 mm
Spline: Ø44.5 · 10 teeth
Springs: 6
Max torque: 2300 N·m
Fitment: Medium trucks >200 hp, Ø395 clutch

Ø430 Clutch Disc (Part 1)

Matching clutch covers available — we'll match to your truck model.

4 / 15

K430-01

★ BEST SELLER

Ø430 Clutch Disc • 3-Stage, Large 6 Open-Coil



Friction: Ø430×260 mm

Spline: Ø52.5 · 10 teeth

Springs: 6

Max torque: 3400 N·m

Fitment: For 380-520 hp; flywheel bore 240 mm
(Renault >=450 hp also usable)

K430-02

Ø430 Clutch Disc • 3-Stage, Large 6 Open-Coil (260 Family)



Friction: Ø430×260 mm

Spline: Ø52.5/54.8 · 10 teeth

Springs: 6

Max torque: 3210 N·m

Fitment: For under 315 hp; flywheel bore 260 mm
(Renault >=450 hp also usable)

K430-03

★ BEST SELLER

Ø430 Clutch Disc • 3-Stage, Large 6 Open-Coil (Eaton)



Friction: Ø430×260 mm

Spline: Ø54.8 · 24 teeth

Springs: 6

Max torque: 3400 N·m

Fitment: For 420-500 hp; flywheel bore 260 mm (e.g.
Shacman Delong X3000)

K430-04

Ø430 Clutch Disc • 3-Stage, Large 8 Open-Coil



Friction: Ø430×240 mm

Spline: Ø44.6/50.8 · 10 teeth

Springs: 8

Max torque: 2950 N·m

Fitment: For under 315 hp; flywheel bore 260 mm
(Renault >=450 hp also usable)

Ø430 Clutch Disc (Part 2)

Matching clutch covers available — we'll match to your truck model.

5 / 15

K430-05

★ BEST SELLER

Ø430 Clutch Disc • HOWO • 3-Stage, 6-Coil (Raised Hub)



Friction: Ø430×240 mm
Spline: Ø52.5 · 10 teeth
Springs: 6
Max torque: 2750 N·m
Fitment: For under 460 hp; flywheel bore 240 mm
(Renault >=450 hp also usable)

K430-06

Ø430 Clutch Disc • 3-Stage, Large 6 Covered-Coil



Friction: Ø430×240 mm
Spline: Ø54.8/52.5 · 10 teeth
Springs: 6
Max torque: 3210 N·m
Fitment: For 380-460 hp; flywheel bore 240 mm

K430-07

Ø430 Clutch Disc • 3-Stage, Large 5 Open-Coil (Option)



Friction: Ø430×260 mm
Spline: Ø54.8/52.5 · 10 teeth
Springs: 5
Max torque: 3210 N·m
Fitment: For 500-560 hp; flywheel bore 260 mm

K430-08

Ø430 Clutch Disc • Mining / Wide-body



Friction: Ø430×260 mm
Spline: Ø50.0 · 48 teeth
Springs: 6
Max torque: 3210 N·m
Fitment: For 765-859 and 891 hp; mining wide-body trucks

K430-09

Ø430 Clutch Disc · AMT · Large 6 Open-Coil



Friction: Ø430×260 mm
Spline: Ø50.8 · 10 teeth
Springs: 6
Max torque: 3400 N·m
Fitment: For 500-560 hp; flywheel bore 260 mm

K430-10

Ø430 Clutch Disc · AMT · Large 5 Open-Coil



Friction: Ø430×288 mm
Spline: Ø50.8 · 24 teeth
Springs: 6
Max torque: 3800 N·m
Fitment: For under 510 hp; with 430 push-type AMT cover

K430-11

Ø430 Clutch Disc · 3-Stage, Small 8 Open-Coil (Ø44.5)



Friction: Ø430×240 mm
Spline: Ø44.5 · 10 teeth
Springs: 8
Max torque: 3000 N·m
Fitment: For under 350 hp; 430 mm clutch

K325-01C

★ BEST SELLER

Ø325 Clutch Cover • Diaphragm



PCD: Ø365 mm | Clamp load: ≥ 11000 N
Bolt hole: Ø11 mm | Pin notch: Ø9.4 mm
Fitment: Dongfeng ZD30, YC4S140-50, YCY24140-60,
Yunnei YN33/YN38/D25/D30 on Junling, Kangling,
HOWO Hangjiang, Captain K6/K7, Dorica D6/D7/D9

K325-02C

Ø325 Clutch Cover • Aumark



PCD: Ø368.3 mm | Clamp load: ≥ 10000 N
Bolt hole: Ø11 mm | Pin notch: Ø9.5/7.9 mm
Fitment: Same as new positive-hole Ø325 cover

K325-03C

Ø325 Clutch Cover • Isuzu



PCD: Ø368.3 mm | Clamp load: ≥ 10000 N
Bolt hole: Ø11 mm | Pin notch: Ø9.5/7.9 mm
Fitment: CA4D, WP3, ISF3.8s4R141, ISF2.8s,
ISF3.8s5141, JND408D143-52 engines; Jiefang, JAC,
Foton

K350-01C

★ BEST SELLER

Ø350D Clutch Cover • Diaphragm



PCD: Ø379 mm | Clamp load: ≥ 15000 N
Bolt hole: Ø10.7 mm | Pin notch: Ø9.5/7.9 mm
Fitment: Yunnei F40E/D30; Weichai WP3N/WP4.1, EQ1108/1118

K350-02C

★ BEST SELLER

Ø350 Clutch Cover • Aumark



PCD: Ø381 mm | Clamp load: ≥ 11000 N
Bolt hole: Ø12.5 mm | Pin notch: Ø9.5/7.4 mm
Fitment: Foton Cummins engine (same as CA151)

K350-03C

Ø350 Clutch Cover • Isuzu



PCD: Ø381 mm | Clamp load: ≥ 11000 N
Bolt hole: Ø12.5 mm | Pin notch: Ø9.5/7.4 mm
Fitment: Foton Cummins engine (same as CA151)

K350-04C

Ø350 Clutch Cover • SanHuan Diaphragm



PCD: Ø381 mm | Clamp load: ≥ 11000 N
Bolt hole: Ø11 mm | Register: Ø392 mm
Fitment: Yuchai only (high bolt holes)

K380-01C

★ BEST SELLER

Ø380 Clutch Cover • Diaphragm



PCD: Ø410 mm | Clamp load: ≥ 16000 N
Bolt hole: Ø11 mm | Pin notch: Ø8 mm
Fitment: Aumark S5; Foton Cummins ISF3.8; Yunnei, etc.

K380-02C

Ø380 Clutch Cover • Aumark



PCD: Ø379 mm | Clamp load: ≥ 18000 N
Bolt hole: Ø10.7 mm | Pin notch: Ø8.1 mm
Fitment: JAC / Foton with Foton Cummins ISF3.8

K380-03C

Ø380 Clutch Cover • Isuzu



PCD: Ø379 mm | Clamp load: ≥ 18000 N
Bolt hole: Ø10.7 mm | Pin notch: Ø8.1 mm
Fitment: JAC / Foton with Foton Cummins ISF3.8

K395-01C

★ BEST SELLER

Ø395 Clutch Cover • Diaphragm



PCD: Ø410 mm | Clamp load: ≥ 17000 N
Bolt hole: Ø10.7 mm | Register: Ø435 mm
Fitment: Jiefang J6L/LongV/JK6; Dongfeng Dorica D9;
Dongfeng Tianjin KR; JAC Junling V8/Shuailing
Q7/Gallop A5; Sinotruk HOHAN H3

K395-02C

Ø395 Clutch Cover • Diaphragm (Large Bolt Holes)



PCD: Ø410 mm | Clamp load: ≥ 17000 N
Bolt hole: Ø12.7 mm | Register: Ø435 mm
Fitment: Yuchai engines

Ø430 Clutch Cover (Part 1) · Pull-Type

Matching clutch discs available — we'll match to your truck model.

11 / 15

K430-01C

★ BEST SELLER

Ø430 Clutch Cover · Pull-Type · SKS



PCD: Ø475 mm | Clamp load: ≥ 39000 N
Bolt hole: Ø11 mm | Register: Ø475 mm
Fitment: For construction trucks under 420 hp;
flywheel bore 240 mm (except Renault engines)

K430-02C

Ø430 Clutch Cover · Pull-Type · SKS 260



PCD: Ø450 mm | Clamp load: ≥ 43500 N
Bolt hole: Ø11 mm | Register: Ø475 mm
Fitment: For 500-560 hp; flywheel bore 260 mm

K430-03C

★ BEST SELLER

Ø430 Clutch Cover · Pull-Type · Eaton



PCD: Ø450 mm | Clamp load: ≥ 41000 N
Bolt hole: Ø11 mm | Register: Ø475 mm
Fitment: For 420-500 hp; flywheel bore 240 mm
(except Renault engines)

K430-04C

★ BEST SELLER

Ø430 Clutch Cover · Pull-Type · Valeo



PCD: Ø475 mm | Clamp load: ≥ 39000 N
Bolt hole: Ø11 mm | Register: Ø475 mm
Fitment: For construction trucks under 420 hp;
flywheel bore 240 mm (except Renault engines)

Ø430 Clutch Cover (Part 2) · Pull-Type

Matching clutch discs available — we'll match to your truck model.

12 / 15

K430-05C

★ BEST SELLER

Ø430 Clutch Cover · Pull-Type · Sinotruk



PCD: Ø450 mm | Clamp load: ≥ 42000 N
Bolt hole: Ø11 mm | Register: Ø475 mm
Fitment: For 380-520 hp; flywheel bore 240 mm
(except Renault engines)

K430-06C

Ø430 Clutch Cover · Pull-Type · Sinotruk (260 Family)



PCD: Ø450 mm | Clamp load: ≥ 43500 N
Bolt hole: Ø11 mm | Register: Ø475 mm
Fitment: For under 315 hp; flywheel bore 260 mm

K430-07C

★ BEST SELLER

Ø430 Clutch Cover · Pull-Type · HOWO



PCD: Ø450 mm | Clamp load: ≥ 42000 N
Bolt hole: Ø11 mm | Register: Ø475 mm
Fitment: For under 460 hp; flywheel bore 240 mm
(except Renault engines)

K430-08C

Ø430 Clutch Cover · Pull-Type · 95U



PCD: Ø450 mm | Clamp load: ≥ 43500 N
Bolt hole: Ø11 mm | Register: Ø475 mm
Fitment: For 500-560 hp; flywheel bore 260 mm

K430-09C

Ø430 Clutch Cover · Push-Type · EQ



PCD: Ø450 mm | Clamp load: ≥ 22000 N
Bolt hole: Ø11 mm | Register: Ø475 mm
Fitment: For under 315 hp; flywheel bore 240 mm

K430-10C

Ø430 Clutch Cover · Push-Type AMT · Small



PCD: Ø450 mm | Clamp load: ≥ 32000 N
Bolt hole: Ø11 mm | Register: Ø475 mm
Fitment: For under 510 hp; Auman and other push-type AMT models

K430-11C

Ø430 Clutch Cover · Push-Type AMT · Large



PCD: Ø450 mm | Clamp load: ≥ 32000 N
Bolt hole: Ø11 mm | Register: Ø475 mm
Fitment: For under 510 hp; Auman and other push-type AMT models

K430-12C

Ø430 Clutch Cover · Push-Type



PCD: Ø450 mm | Clamp load: ≥ 23000 N
Bolt hole: Ø11 mm | Register: Ø475 mm
Fitment: For luxury coaches, etc.

- 1

Disc — match the gearbox input shaft Spline teeth and spline Ø (e.g. 10 teeth × Ø38.4), plus friction-face OD/ID (outer/inner diameter).

→ Wrong spline (teeth or Ø) won't fit the shaft; wrong friction size won't match the cover.
- 2

Cover — match the flywheel Bolt-circle diameter (PCD) and hole count, or pin-notch / register diameter.

→ Wrong PCD: the bolts won't line up with the flywheel holes.
- 3

Kit or separate? — disc and cover are NOT a fixed 1:1 pair Disc interchanges within a size group; covers don't (flywheel differs).

Matched disc + cover set? Send us your truck model — we'll confirm the right pair.

Same size, different fit — check before ordering

Size	Fitment conflict	Result
Ø325	PCD 365 (diaphragm) vs 368.3 (Aumark / Isuzu)	3.3 mm off — won't fit
Ø350	PCD 379 (350D: Yunnei / Weichai) · 381 (Aumark / Isuzu / SanHuan) · register 392 (SanHuan Yuchai)	Check flywheel PCD
Ø380	PCD 410 (Aumark S5) vs 379 (Aumark / Isuzu) — same ISF3.8 engine	Not interchangeable
Ø395	Bolt hole Ø10.7 (FAW J6L type) vs Ø12.7 (Yuchai) — same PCD 410	Wrong hole won't bolt up
Ø430 (truck)	PCD 450 vs 475 · flywheel bore 240 vs 260 family	Not interchangeable
Ø430 (Mercedes)	Disc spline Ø50.8 vs Ø44.45	Not interchangeable

Our discs are identified by size, not by OE number. For Japanese / European applications, provide the OE number or a brand reference (AISIN / EXEDY / Sachs / Valeo).

Mercedes-Benz Actros 430 Kit

Item	Specification
Cover OEM	3482 081 232 · MFZ430 · 430×235 · PCD 450
Disc OEM	1878 634 027 (430WGTZ) · 430×240 · 10T × Ø50.8
Same Family	1878 007 072 (18T) · 1878 002 735 (10T) · 1878 080 031 (Ø44.5×10T, not interchangeable with Ø50.8)
Release Bearing	KZISZ-5
Application	Mercedes-Benz Actros / Axor / Atego (Ø430 mm)

Japanese HD Reference (432 / 430)

Platform	Disc Size	Spline	Cover PCD	Ref
Isuzu 6WA1 / 12PE1	430×250	18T × Ø50.8	456	1-31240-621-0 / 1-31220-081-0
Mitsubishi FUSO 6M70 / 6D22 / 6D40	430×250	—	456	ME538108 / ME509549
Isuzu 6HH1	380×240	10T × Ø44.7	405	1-31240-832-0 / 1-31220-170-0
Mitsubishi FUSO 6D17	350×220	14T × Ø44	375	ME521056 / ME521150

MATCHING PARTS Release bearings — tell us your truck model or VIN.

Full Japanese cross-reference list available on request.
European models (Volvo / Scania / DAF / Renault / MAN) — order by OE number or sample.

CONTACT US

TorqClutch

WhatsApp / Tel: +86 131 2736 0650

Email: sunny@torqclutch.com

Web: torqclutch.com

Tell us your truck model & quantity — we confirm specs with our factory and send our best FOB price.